

LED Module Flood Light


APPLICATION
Parks, Gardens, Billboard, Facade Lightings, Parking Areas, Commercial and Residential Areas.

FEATURES


- Built-In IC TECHNOLOGY
- Over temperature protection
- Filtered waveform, Stable voltage
- High system Efficiency
- Thin & light weight size
- IP65

LUMINAIRE SPECIFICATION

- Input Voltage : AC100-265V 50/60Hz
- Power : 200W/250W/300W/400W/500W/600W
- Colour Temperature : 6500K (Day Light)
- Colour Rendering Index : Ra > 70
- Beam Angle : 90°
- Power Factor : ≥ 0.95
- Efficiency : ≥ 88%
- Operating Temperature : -25 °C ~ 40 °C
- Lifetime : 30,000 Hrs
- IK/IP Protection Level : IK08/IP65
- Surge Protection : 6KV
- Insulation Grade : Class I
- Fitting Material : Die-cast Aluminium



Wall Mounted




Sitting mode



Ceiling type



Street lamp

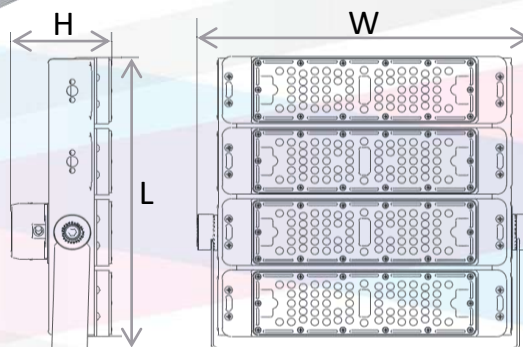

Model	Power (W)	Input Voltage	CCT (K)	CRI	Lumen (lm)	PF	Quantity of LED	Size L x W x H (mm)	Net Weight
BSFLHD-1200	200W	AC100~265	6500	>70	24000	0.95	256 pcs	315 x 355 x 105	4.50 kg
BSFLHD-1250	250W	AC100~265	6500	>70	30000	0.95	320 pcs	395 x 355 x 105	5.54 kg
BSFLHD-1300	300W	AC100~265	6500	>70	36000	0.95	283 pcs	475 x 355 x 105	5.83 kg
BSFLHD-1400	400W	AC100~265	6500	>70	48000	0.95	512 pcs	315 x 672 x 105	9.60 kg
BSFLHD-1500	500W	AC100~265	6500	>70	60000	0.95	640 pcs	395 x 672 x 105	11.53 kg
BSFLHD-1600	600W	AC100~265	6500	>70	72000	0.95	765 pcs	475 x 672 x 105	14.00 kg

Remark *: For higher wattage(up to 1000W) need to be pre-order in advance.