



LED Flood Light (PF 0.95)



APPLICATION

Parks, Gardens, Billboard, Facade Lightings, Parking Areas, Commercial and Residential Areas.




FEATURES

- Built-In IC TECHNOLOGY
- Over temperature protection
- No external driver required
- Filtered waveform, Stable voltage
- High system efficiency
- Thin & light weight size



LUMINAIRE SPECIFICATION

- Power : 50W/100W/150W/200W/300W
- Fitting Material : Die-cast Aluminium Non-corrosive
- Optical Cover : Textured glass
- Color Temperature : Day Light
- Fitting Color : Black
- Ingress Protection : IP65
- Impact Protection : IK08
- Voltage : AC220~240V 50/60Hz
- Electrical Safety Class : Class I
- Operating Temperature : -30°C ~ +40°C
- Installation : Mounting Bracket
- Surge Protections : 10KV
- Pre-Wire : 300 mm
- Color Rendering Index : CRI > 80
- Beam Angle : 120°
- Lifetime : 15,000Hrs

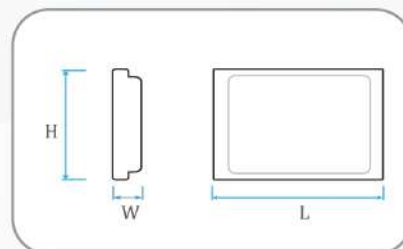

Model	Power (W)	Input Voltage	CCT (K)	Lumen (lm)	PF	IP	Size L x W x H (mm)	Net Weight	Packing
BSFL-8050	50W	220~240	6500K	5000	0.95	65	178 x 27 x 125	0.9 kg	20/CTN
BSFL-8100	100W	220~240	6500K	10000	0.95	65	266 x 30 x 190	1.7 kg	10/CTN
BSFL-8150	150W	220~240	6500K	15000	0.95	65	321 x 34 x 222	2.8 kg	5/CTN
BSFL-8200	200W	220~240	6500K	20000	0.95	65	385 x 34 x 265	3.3kg	5/CTN
BSFL-8300	300W	220~240	6500K	30000	0.95	65	435 x 65 x 318	4.5 kg	5/CTN