



LED HIGH BAY IP65 with High Surge Protection



APPLICATION

Ideal for Warehouse Lighting,
Factory Lighting, Exhibition Hall,
Stadium Lighting.





FEATURES

- Long Life LED Chips
- Universal Voltage 100 ~ 265V 50/60Hz
- Operating Temp. -20°C ~ 50°C
- Aluminium Die-casting Housing
- 90° Beam Angle Available
- 0.95PF
- 14KV Surge Protection
[4KV internal + 10KV external]
- IP65 rating fully dust tight & protected
against solid objects



14KV Surge Protector [4KV Internal + 10KV External]

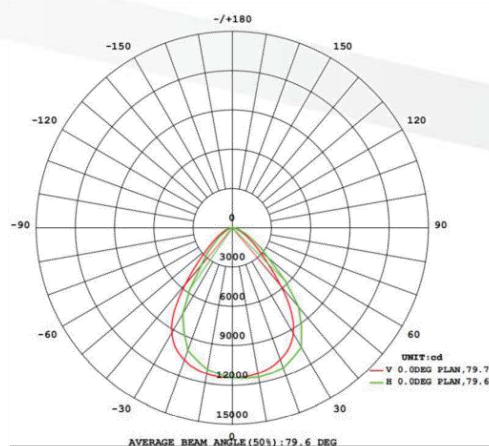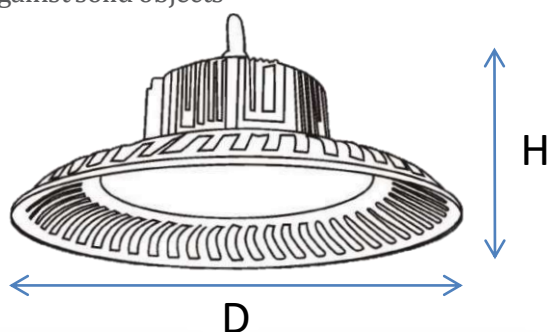

Luminous Intensity Distribution Diagram



Model	Power (W)	CCT (K)	CRI	Lumen (lm)	PF	IP	Life Time	Size - D x H (mm)	Net Weight	Packing
BSHB03-100	100W	6500	>70	11000	0.95	65	35,000 H	Ø300 x 125	1.35 kg	4/CTN
BSHB03-150	150W	6500	>70	16500	0.95	65	35,000 H	Ø350 x 125	1.95 kg	4/CTN
BSHB03-200	200W	6500	>70	22000	0.95	65	35,000 H	Ø400 x 125	2.55 kg	4/CTN

Remark *: All result tested based on 6500K