


GNG -EFL-LED FLOOD LIGHT STD


50W/100W/150W/200W/300W




- + Adopts self-made DC Driver built-in power supply design, through the test of the third-party authority, the efficiency is up to 98%;
- + High surge protection 4-4KV, so that the light can be used on a higher lamp pole;
- + The latest reflection application technology, high reflection efficiency and consistency;
- + The whole die-casting aluminum shell, beautiful, strong and waterproof.

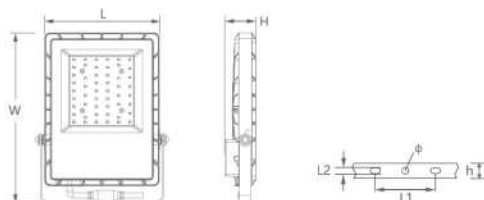

LIGHT DISTRIBUTION CURVE



110°



60°

PRODUCT SIZE (mm)

	50W	100W	150W	200W	300W
W	213	266	330	363	452
L	142	177	221	247	300
H	38	40	45	45	55
Φ	7	9	11	11	11
L1	76	90	120	120	160
L2	6	6.5	11	11	12
h	15	20	25	30	40





PRODUCT PARAMETERS

	50W	100W	150W	200W	300W
Model	EFL50W6K	EFL100W6K	EFL150W6K	EFL200W6K	EFL300W6K
System power(W)	50	100	150	200	300
System output(Lm)	6500	13000	19500	26000	39000
Efficacy(Lm/W)	130				
Color temperature(K)	3000K/4000K/5000K/6000K				
CRI(Ra)	80				
Input voltage	220V~240VAC/50-60Hz				
PF	>0.95				
Beam angle	110DEG				
IP	IP66				
IK	IK06,4mm toughened glass				
Electrical appliance class	Class I				
Applicable ambient temperature	-20~45°				
Surge grade	L-N:4KV L/N-PE:4KV				
Luminaire lifespan	50000hs@Lm70,Ta35°				